



carmanah®
we put solar to work

GUIDELINE FOR AIRCRAFT WARNING LIGHTS – NIGHT


FOR TOWERS TALLER THAN 45 M / 150 FT.

COMPLIANT LIGHTING


MODEL: OL2000
(solar and non-solar options)



COMPLIANCE STANDARDS:

 ICAO Medium Intensity Type B
(2000 cd, red, flashing)


Optional ICAO Medium Intensity Type C
(steady-on) available


 FAA L-864
(2000 cd, red, flashing)

MODEL: OL800



COMPLIANCE STANDARDS:

 ICAO Low Intensity Type B
(32 cd, red, steady-on)


 FAA L-810
(32.5 cd, red, steady-on)

NON-COMPLIANT LIGHTING

MODEL: OL800
(red, flashing or steady-on)



MODEL: OL4
(red, steady-on)

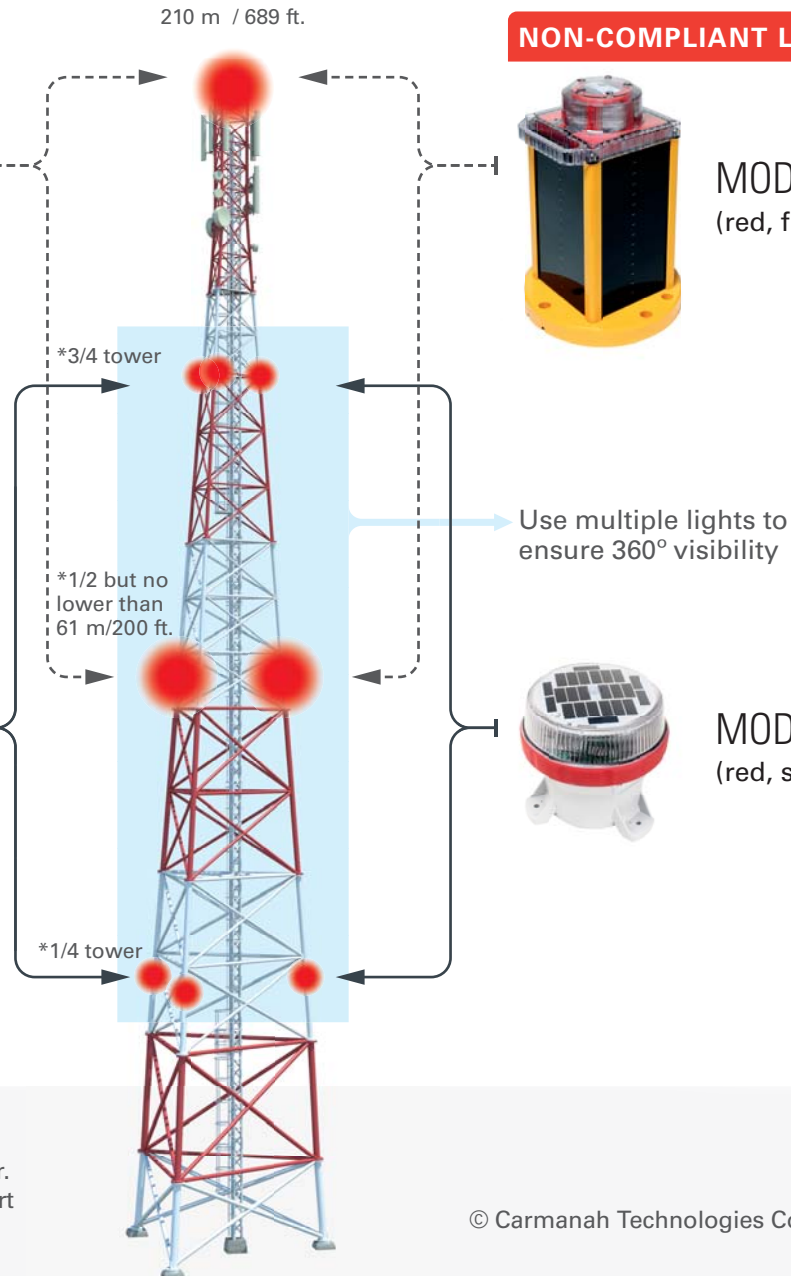

Example configuration of 210 m / 689 ft. tower.
*Refer to FAA Style A or ICAO (Annex 14) chart for additional height guides.